


# CPC-3408

4U 8-slot CompactPCI Platform

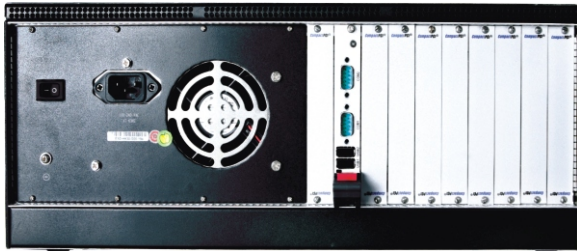

6

CPCI & TCA  
Platforms

## SPECIFICATIONS

**Chassis:** 4U 19" CPCI rackmount chassis  
**Dimensions:** 4U (H) x 436mm (W) x 297.6mm (D)  
**System Slots:** 1 x system slot and 7 x peripheral slot  
**Chassis Materials:** Sheet-metal main frame, coating surface  
**Backplane:** 3U 8-slot CPCI rear board  
**Power Supply:** AC input, 400W non-redundant ATX power supply, MTBF ≥ 50000 hours  
**Operating Temperature:** -20°C~60°C  
**Storage Temperature:** -40°C~85°C  
**Operating Humidity:** 20%~95%  
**Anti-vibration:** 5-17Hz/1mm amplitude, 17-200Hz/1G acceleration  
**Anti-shock:** 10G peak-peak acceleration, 11ms duration  
**Chassis Assembling:** Convenient to insert or pull out card and good contacts  
**Heat Dispersion:** Conforms to PC Exotherm Provisions  
**Safety:** Conforms to GB/T 9813  
**EMC:** Limits of radio disturbance are compliant with GB9254-1998 class-B. Immunity to disturbance is compliant with GB/T 17618  
**Support :** PICMG 2.0 and PICMG 2.1

## FEATURES

- 4U 8-slot 19" CPCI rackmount chassis
- 8 x 3U slot, consisting of 1 x system slot and 7 x peripheral slot
- "Zero" bay for system monitoring module
- Supports 1 x 400W non-redundant ATX power supply
- 6" LCD screen, touch screen (optional)

## ORDERING INFORMATION

Model Number	Description
CPC-3408A	19"/4U 8-slot/3U CPU card/CPC-9308 rear board/350W AC ATX power supply/system management control module/LCD screen and touch screen/PICMG2.0
CPC-3408B	19"/4U 8-slot/3U CPU card/CPC-9308 rear board/350W AC ATX power supply/system management control module/PICMG2.0
CPC-3408C	19"/4U 8-slot/3U CPU card /CPC-9308 rear board/350W AC ATX power supply/system management control module /LCD screen/PICMG2.0